

2007 – Current Jeep Wrangler **Installation Instructions**

Congratulations on your purchase of a high quality PUTCO product. Should you need any application or technical assistance, feel free to call us at: 1-800-247-3974

Monday-Friday 8:00 a.m. - 5:00 p.m. (Central Standard Time)

Contact your PUTCO dealer for other quality accessories.

Visit www.putco.com for warranty and other product information.

Please read all instructions before installation and to check to see that all parts are included.

KIT CONTENTS:	
Description	Qty
Hood Shield	1
Grille Bumpers	2
Alcohol Prep Pad	1
3M Tape (Clear version only)	1 roll


Tools Required:

- Clean Towel
- Flat Head Screwdriver
- Magic Marker
- Adhesive Remover


Hood Shield Installation-

Note: Black Hood Deflector comes with all 3M tape pre-installed. The clear paintable comes with a roll of 3M tape in the event you choose to back paint it before installation.

1. Clean and dry the vehicle thoroughly.
2. The vehicle surface temperature must be a minimum of 15°C (60°F).
3. Remove outer two plastic rivets of the grille using a flat head screwdriver. Pry up center rivet first, then remove outer. Save for later use. Refer to Figure 1 (Drives Side Shown).

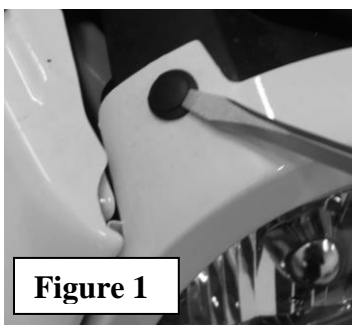

4. Align the hood Shield with the two outer rivet holes, then mark the weather-strip on either side of the hood shield center tab. Carefully peel seal away from grille in this area. Refer to Figure 2.

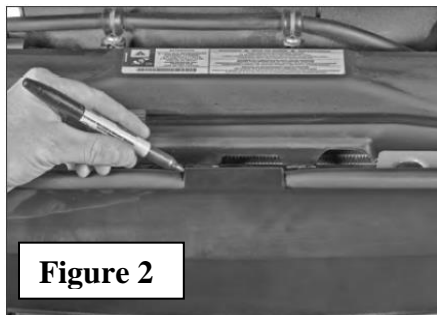


5. Thoroughly clean area shown with adhesive remover. Refer to Figure 3.




6. Use the alcohol prep pads to clean the area shown. This is the area the 3M tape will be adhered. Refer to Figure 4.



7. Slip hood shield tab under weather-strip being careful not to touch adhesive to the grille until the two outer holes are aligned. When aligned, press and hold in position for 30 seconds along the top edge of hood shield.

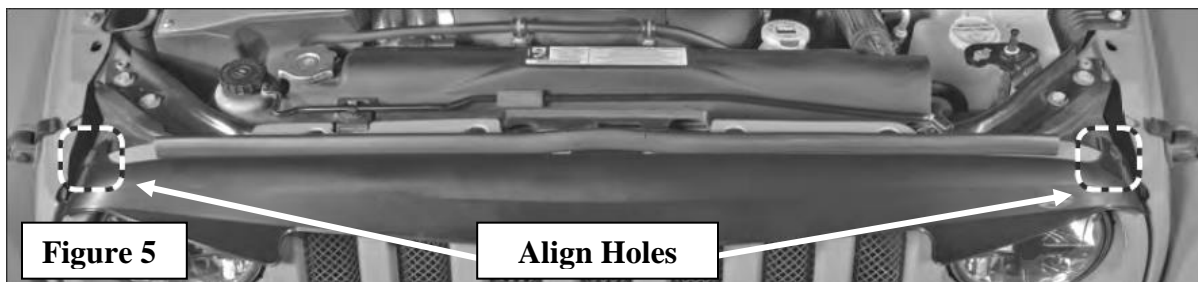

8. Use the alcohol prep to clean the grille surface in the area shown in figure 6. Peel the release liner and apply to the grille in the areas shown. Applying to the hood shield is ok but can scuff the factory paint over time.

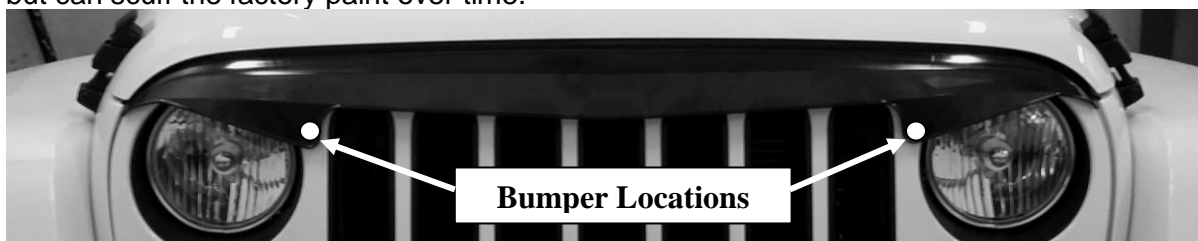

9. Enjoy!!